FILT'RAY 2-month shower head filter

Ref. AT030715

Non-sterile



DESCRIPTION

FILT'RAY 2-month shower head filter

Ref. AT030715

AQUATOOLS anti-Legionella and all-germ shower filter.
Device made from ABS.
Membrane type: tubular microfiltration.
Membrane made from polyethylene.
Pore cut-off threshold: 0.1µm nominal and 0.2µm absolute sterilising grade.
Filtration flow rate: 11.9 lpm at 3 bar and 4.5 lpm at 1 bar
(filter only, excludes any flow rate restriction in the shower).
Maximum upstream pressure at the point-of-use: 5 bar.
Maximum lifespan: 2 months after installation.
Withstands thermal shocks: 70°C for 30 minutes.
Withstands chemical shocks: active chlorine levels up to 100 ppm
for 2 hours (cumulative total).
Non-sterile filter.
CE marked Class I medical device.
Packaged in boxes of 10.


ADVANTAGES

- Anti-Legionella and all-germ
- Lifespan: 2 months from installation
- Bubl'air Wash: longer filter life
- Rapid installation with no tools required

TECHNICAL CHARACTERISTICS

FILT'RAY 2-month shower head filter - Ref. AT030715

Connector	M1/2"
Technology	Point-of-use filtration
Height	70mm
Length	225mm
Flow rate	11.9 lpm at 3 bar, 4.5 lpm at 1 bar
Lifespan	2 months
Norms	ACS CE WRAS

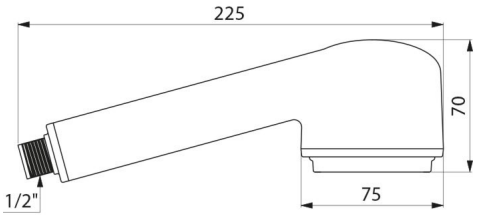

© AQUATOOLS