FILT'RAY Compact 2-month shower head filter

Ref. AT30261

Non-sterile



DESCRIPTION

FILT'RAY Compact 2-month shower head filter

Ref. AT30261

AQUATOOLS anti-Legionella and all-germ shower filter.
Device made from ABS.
Membrane type: tubular microfiltration.
Membrane made from polyethylene.
Pore cut-off threshold: 0.1µm nominal and 0.2µm absolute sterilising grade.
Qualified water volume per duration of use: 6,000 litres.
Filtration flow rate: 6 lpm at 1 bar, 11.2 lpm at 3 bar and 13 lpm at 5 bar (filter only, excludes any flow rate restriction in the shower valve).
Maximum upstream pressure at the point-of-use: 5 bar.
Maximum lifespan: 2 months after installation.
Resistance to thermal shocks: 70°C for 30 minutes.
Resistance to chemical shocks: active chlorine levels up to 100 ppm for 2 hours (cumulative total).
Non-sterile filter.
CE Class I medical device.
Weight: empty filter 105g / full filter 186g.
Packaged in boxes of 10 units.


ADVANTAGES

- Anti-Legionella and all-germ
- Space saving
- Lifespan: 2 months after installation
- Quick to install without tools

TECHNICAL CHARACTERISTICS

FILT'RAY Compact 2-month shower head filter - Ref. AT30261

Connector	M1/2"
Technology	Point-of-use filtration
Height	62mm
Length	194mm
Flow rate	6 lpm at 1 bar, 11.2 lpm at 3 bar and 13 lpm at 5 bar
Diameter	56mm
Lifespan	2 months
Norms	ACS CE WRAS KTW BWGL

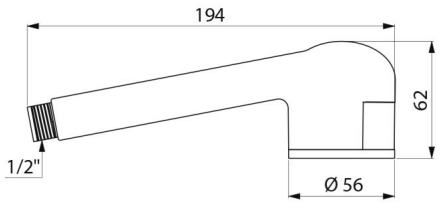

© AQUATOOLS