# FILT'RAY 2G 3 month shower filter

Ref. AT030714

Sterile

## DESCRIPTION

**FILT'RAY 2G 3 month shower filter**
**Ref. AT030714**

AQUATOOLS anti-Legionella and all-germ shower filter.
Device made from MBS.
Membrane type: tubular microfiltration.
Membrane made from polyethylene.
Pore cut-off threshold: 0.1µm nominal and 0.2µm absolute sterilising grade.
Filtration flow rate: 9 lpm at 3 bar and 6 lpm at 1 bar (filter only, excludes any flow rate restriction in the shower valve).
Maximum upstream pressure at the point-of-use: 5 bar.
Maximum lifespan: 3 months from installation.
Withstands thermal shocks: 70°C for 30 minutes.
Withstands chemical shocks: active chlorine levels up to 100 ppm for 3 hours (cumulative total).
Sterile filter.
FILT'RAY 2G sterile disposable water filters are:
CE marked Class Is Medical Devices in Europe that comply with directive 93/42/CEE;
Class II Medical Devices in the U.S.A. with FDA-510(K) clearance;
Class I Medical Devices in Canada that comply with SOR/98-282.
Packaged in boxes of 10, each filter is individually wrapped and sterile.

## ADVANTAGES

- Anti-Legionella and all-germ
- Lifespan: 3 months from installation
- Rapid installation with no tools required

## TECHNICAL CHARACTERISTICS

**FILT'RAY 2G 3 month shower filter - Ref. AT030714**

| | |
|---|---|
| Supply | M1/2" |
| Technology | Point-of-use filtration |
| Height | 70mm |
| Length | 225mm |
| Flow rate | 9 lpm at 3 bar and 6 lpm at 1 bar |
| Lifespan | 3 months |
| Norms | ACS CE WRAS |

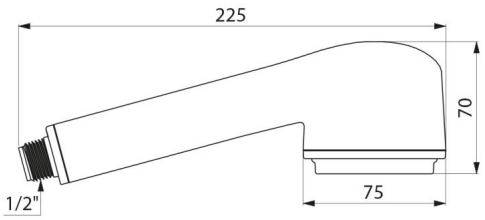


© AQUATOOLS