Sediment filter, 5µm

Ref. AT50680

6 months



DESCRIPTION

Sediment filter, 5µm

Ref. AT50680

PREFILT 5µm sediment filter.
Retains particles larger than 5µm.
Filter cartridge can be replaced without changing the filter body.
Membrane surface area: 0.5m².
Capacity: 18,000L.
Maximum lifespan: 6 months.
Filtration flow rate: 9 lpm (with integrated flow restrictor), 14 lpm (without flow restrictor) at 3 bar.
Materials: Body and filtration cartridge made of polypropylene. Filter cartridge plastic components made of ABS.
Temperature: 4 - 38°C.
Operating pressure: 0.5 - 10 bar.
Connection type: Tube or G3/8".
Compatible with and resistant to chemical shocks (active chlorine levels up to 100 ppm for 1 hour (cumulative total) and thermal shocks (70°C for 30 minutes).


ADVANTAGES

- Lifespan: 6 months after installation
- Sediment filter

TECHNICAL CHARACTERISTICS

Sediment filter, 5µm - Ref. AT50680

Supply	Tube or G3/8"
Length	335mm
Flow rate	9 lpm (with integrated flow restrictor), 14 lpm (without flow restrictor) at 3 bar
Diameter	82mm
Lifespan	6 months
Norms	ACS WRAS

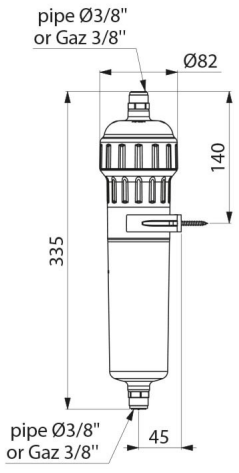

© AQUATOOLS