FILT&SWAP Inline filter

Ref. AT50671

0.2µm microfiltration



DESCRIPTION

FILT&SWAP Inline filter

Ref. AT50671

FILT&SWAP inline anti-Legionella filter 0.2µm.
Microfiltration: Retains all bacteria and other particles larger than 0.2µm.
Filter cartridge can be replaced without changing the filter body.
Membrane surface area: 0.5m².
Capacity: 18,000L.
Maximum lifespan: 6 months.
Filtration flow rate: 9 lpm (with integrated flow restrictor), 14 lpm (without flow restrictor) at 3 bar.
Materials: Body and filtration cartridge made of polypropylene. Filter cartridge plastic components made of ABS.
Temperature: 4 - 38°C.
Operating pressure: 0.5 - 10 bar.
Connection type: Tube or G3/8".
Compatible with and resistant to chemical shocks (active chlorine levels up to 100 ppm for 1 hour (cumulative total) and thermal shocks (70°C for 30 minutes).

ADVANTAGES


Anti-Legionella

6 months

TECHNICAL CHARACTERISTICS

FILT&SWAP Inline filter - Ref. AT50671

Supply	Tube or G3/8"
Length	235mm
Flow rate	9 lpm (with integrated flow restrictor), 14 lpm (without flow restrictor) at 3 bar
Diameter	82mm
Norms	ACS WRAS

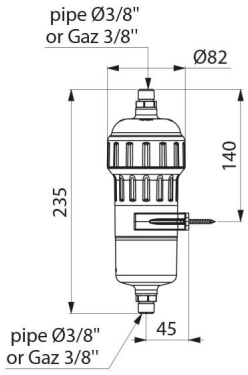

© AQUATOOLS